
SHED SUPPLYS DOOR INSTALLATION GUIDE

PACKAGING: 2-DOORS - 1-LOCK HANDLE - 26 SCREWS

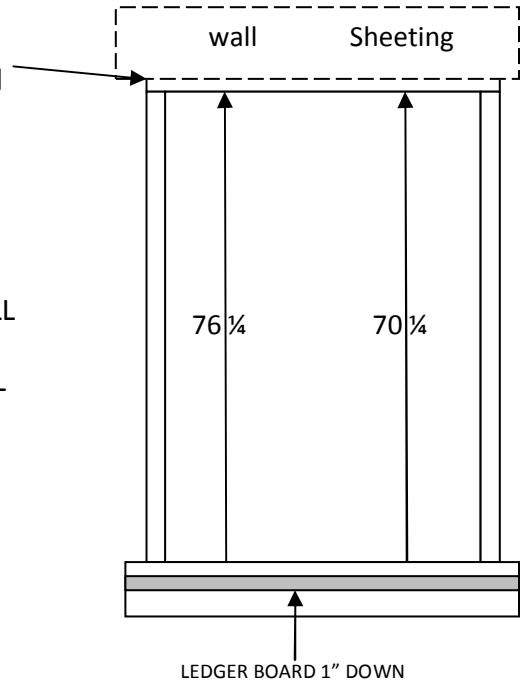

INSTALLATION GUIDELINES

ROUGH OPENINGS

2 - 24" X 72" UNPAINTED WOOD DOORS - 47 ¾ WIDE X 70 ¼ TALL

2 -30" X 72" UNPAINTED WOOD DOORS – 59 ¾ WIDE X 70 ¼ TALL

2 – 30 ½ " X 72" FIBERGLASS DOORS – 61 ½" WIDE X 70 ¼" TALL

2 – 35 ¾" X 72" FIBERGLASS DOORS - 72" WIDE X 70 ¼" TALL

2 - 35 ¾ " X 78" FIBERGLASS DOORS – 72" WIDE X 76 ¼" TALL

1.) SET LEDGER BOARD 1" DOWN FROM TOP OF FLOOR.

2.) SET LEFT DOOR ON LEDGER BOARD MOVE DOOR TO LEFT.

3.) HOLD OUTSIDE CUSTOMER SUPPLIED DOOR STYLE 3/8" ABOVE DOOR.

4.) MAKE SURE DOOR IS SQUARE AND LEVEL SCREW DOORS TO OUTSIDE DOOR STYLE.

5.) HOLD LEFT DOOR TIGHT AGAINST FLOOR DRILL TOP AND BOTTOM HOLES FOR BARREL BOLTS.

6.) SET RIGHT DOOR ON LEDGER BOARD ALLOW 1/4 " GAP BETWEEN DOORS

7.) ADD RIGHT OUTSIDE CUSTOMER SUPPLIED DOOR STYLE 3/8" ABOVE RIGHT DOOR. SCREW RIGHT DOOR TO STYLE.

8. ADD TOP DOOR STYLE

9.) ADD LOCK HANDLE TO DOOR SET BACK HANDLE WITH SET SCREW.